Name	
------	--

CS3516 B10 Computer Networks Mid Term Exam November 16, 2010

Question	Points	Score
0	1	
1	2	
2	3	
3	7	
4	3	
5	5	
6	6	
7	7	
8	3	
9	6	
10	8	
11	10	
12	20	
Total	80	


Trivia Question (1 extra credit point)


0. (a) Which actor played Superman in the 1978 Movie "Superman, the Movie"?


-OR-

(b) What city will host the 2016 summer Olympic Games?


(2 pts.)	1.	Define network architecture.
(2		
(3 pts.)	2.	Explain the role and issues envisioned in the OSI Reference Model for the Presentation Layer.
(5 pts.)	За.	Explain the advantages and disadvantages between store-and-forward and cut-through packet-switched routers inside a sub-network.
(2pts.)	3b.	How does packet switching differ from cell switching?

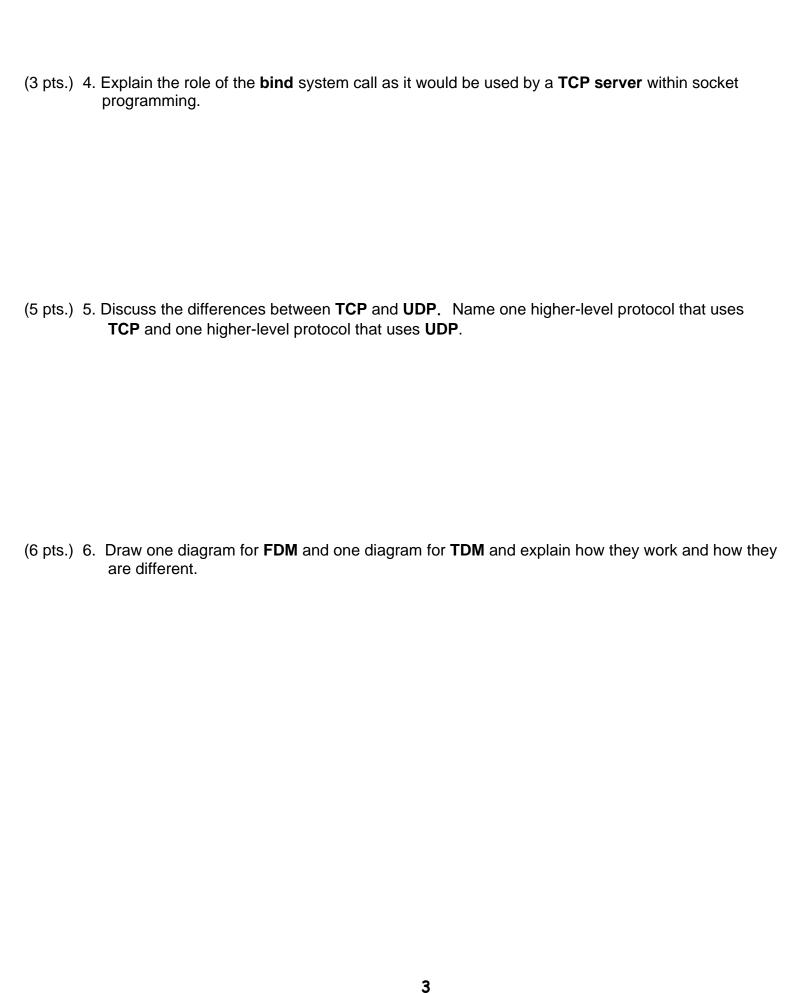

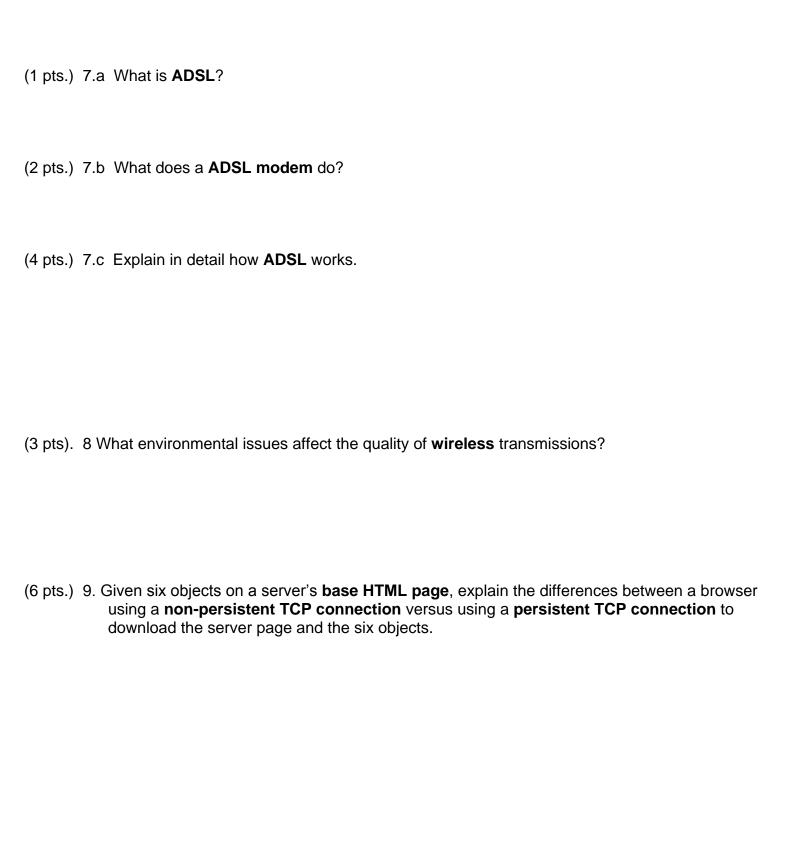

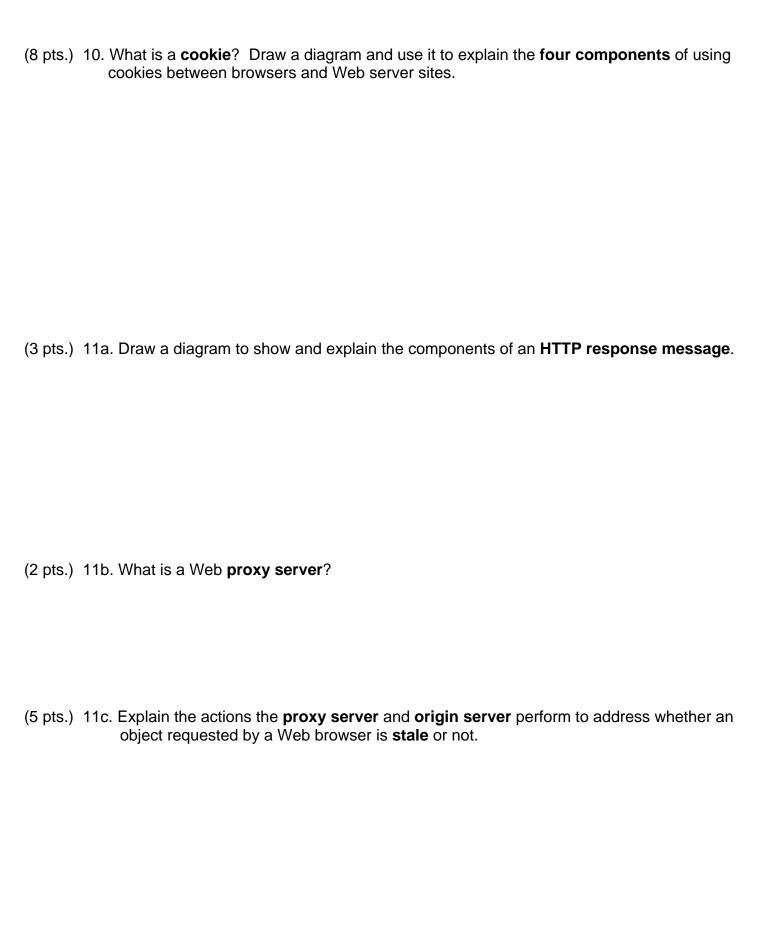

12.

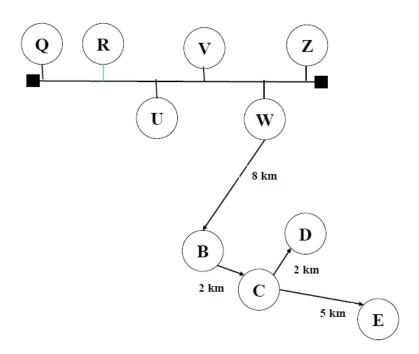

Given the internet pictured above with a propagation speed of **200 m/microsec**. on the **100BASE5** LAN and a propagation speed of **150 m/microsecond** on the store-forward packet-switched WAN where nodes **Q**, **R**, **U**, **V**, **W** and **Z** are equally spaced on the Ethernet with nodes **Q** and **Z** at the opposite extreme ends.

Nodes **W**, **B-E** are spaced on the WAN as shown with **2 Gbps** links between nodes. Assume it takes each WAN node **5 millisec**. to look up a packet's route in its routing table and there is a **1 microsec**. delay for a Ethernet frame to pass through a node on the ether.

Assume an IP packet has **1300 bytes** and the frame header = **100 bytes** and the frame trailer = **100 bytes** on both the Ethernet LAN and the point-to-point WAN.

(18 pts.) a. How long will it take to send a frame from node **Q** to node **E** in the situation that when the frame arrives at node **C** there are four frames waiting to go to node **E** and two frames waiting to go to node **D**? Assume all frames are the same size and that there is no other traffic on the internet when the frame is sent.

{To receive full or partial credit, you MUST show all your work}

(2 pts.) b. Assuming all arriving packets to node **W** come ONLY from the Ethernet, what the maximum possible **utilization** of the outgoing link from node **W** to node **B**.

[Blank Work	Page]
-------------	-------

N	ame			
IN	ame			