



Autonomous Movement

Technical Game Development II

Professor Charles Rich
Computer Science Department
rich@wpi.edu

[see Buckland, Ch. 3
Millington, Ch. 3
<http://opensteer.sourceforge.net>]

IMGD 4000 (D 10)

1

Introduction

- A fundamental requirement in many games is to *move characters (player avatar and NPC's) around* realistically/pleasantly
- For some games, e.g., FPS, realistic NPC movement is pretty much all there is (except shooting)--there is no higher level decision making
- At other extreme, e.g., chess, there is no "movement" per se---pieces just placed
- We're going to treat everything in 2D today, since most game motion in gravity on surface (2 1/2 D)



IMGD 4000 (D 10)

2

Craig Reynolds



- The “giant” in this area---his influence cannot be overstated
 - **1987**: “Flocks, Herds and Schools: A Distributed Behavioral Model,” *Computer Graphics*
 - **1998**: Winner of *Academy Award* in Scientific and Engineering category
 - **1999**: “Steering Behaviors for Autonomous Characters,” *Proc. Game Developers Conference*
 - Currently at U.S. R&D group of Sony Computer Entertainment



IMGD 4000 (D 10)

3

The “Steering” Model

Action Selection

Choosing goals and plans,
e.g.

- “go here”

Steering

- Calculate trajectories to satisfy goals and plans

- Produce steering force that determines where and how fast character moves

Mechanics (“how”) of motion
differs for characters, e.g., fish vs. horse

Locomotion

- independent of steering



IMGD 4000 (D 10)

4

Locomotion Dynamics

```

class Body
// point mass of rigid body
mass      // scalar
position   // vector
velocity   // vector

// orientation of body
heading    // vector

// dynamic properties of body
maxForce   // vector
maxSpeed   // scalar
maxRotation // scalar (not used)

def update (dt) {
    force = ...; // combine forces from steering behaviors
    acceleration = force / mass; // Newton's 2nd law
    velocity += truncate(acceleration * dt, maxSpeed);
    position += velocity * dt;
    // unless almost stopped
    if ( |velocity| > 0.00000001 )
        // update heading to face along velocity vector
        heading = ...velocity...;
}

```

Locomotion



IMGD 4000 (D 10)

5

Individual Steering Behaviors

seek

flee

arrive

pursue

wander

evade

Steering

interpose

hide

avoid obstacles
& walls

follow path

and combinations thereof.....



IMGD 4000 (D 10)

6

Steering Methods

```
class Body
  def update (dt) {
    force = ...; // combine forces from steering behaviors
    ...}

  def seek (target) { ... return force; }
  def flee (target) { ... return force; }
  def arrive (target) { ... return force; }
  def pursue (body) { ... return force; }
  def evade (body) { ... return force; }
  def hide (body) { ... return force; }
  def interpose (body1, body2) { ... return force; }
  def wander () { ... return force; }
  def avoidObstacles () { ... return force; }
  ...
```


Steering



IMGD 4000 (D 10)

7

Seek

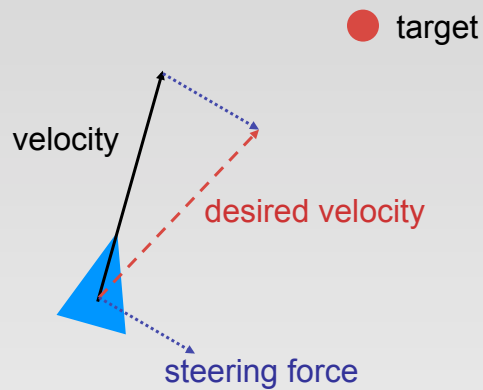

```
def seek (target) {
  // vector from here to target scaled by maxSpeed
  desired = truncate(target - position, maxSpeed);
  return desired - velocity;
}
```

DEMO



IMGD 4000 (D 10)

8

Problem with Seek

- Overshoots target
- Amount of overshoot determined by ratio of maxSpeed to maxForce
- Intuitively, needs to decelerate as gets closer



IMGD 4000 (D 10)

9

Arrive


```
def arrive (target) {
    distance = |target - position|; // to target
    if ( distance == 0 ) return [0,0];

    // current speed required to arrive at rest at target
    // deceleration time is a "tweak" variable
    speed = distance / DECELERATION;

    // current speed cannot exceed body maxSpeed
    speed = min(speed, maxSpeed);

    // vector from here to target scaled by speed
    desired = (target - position) * speed / distance;

    // return steering force as in seek
    return desired - velocity;
}
```



IMGD 4000 (D 10)

10

Arrive Behavior

- When body is far away from target, it behaves just like **seek**, i.e., it closes at maximum speed
- Deceleration only comes into effect when the body gets close to the target, i.e. when 'speed' becomes less than 'maxSpeed' in:

```
speed = min(speed, maxSpeed);
```




IMGD 4000 (D 10)

DEMO

11

Flee (Opposite of Seek)

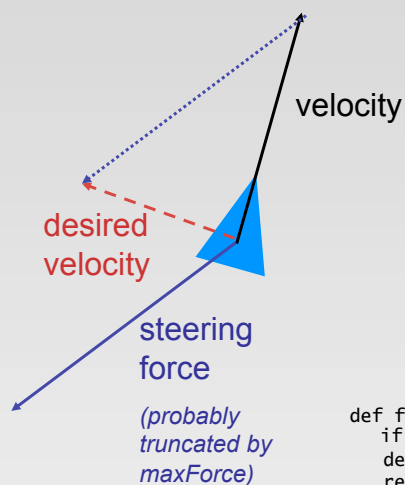

```
def flee (target) {
  if ( |position - target| > PANIC ) return [0,0];
  desired = truncate(position - target, maxSpeed);
  return desired - velocity;
}
```




IMGD 4000 (D 10)

DEMO

12

Pursue (Seek Predicted Position)

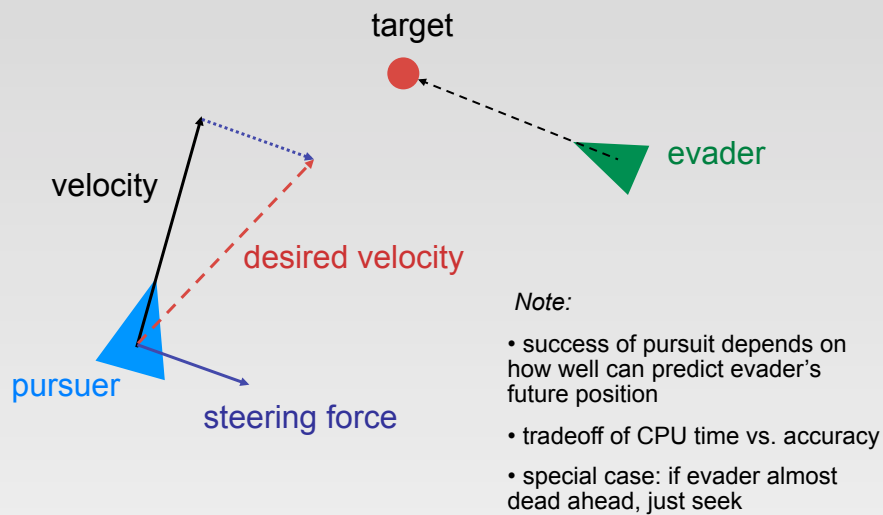

IMGD 4000 (D 10)

13

Pursue

```
def pursue (body) {
    toBody = body.position - position;

    // if within 20 degrees ahead, simply seek
    if ( toBody * heading > 0
        && heading * toBody.heading < -0.95 )
        return seek(body.position);

    // calculate lookahead time based on distance and speeds
    dt = |toBody| / (maxSpeed + |body.velocity|);

    // seek predicted position
    return seek(body.position + (body.velocity * dt));
}
```



IMGD 4000 (D 10)

DEMO

14

Evade (Opposite of Pursue)

```
def evade (body) {
    // no special case check for dead ahead

    // calculate lookahead time based on distance and speeds
    dt = |position - body.position| / (maxSpeed + |body.velocity|);

    // flee predicted position
    return flee(body.position + (body.velocity * dt));
}
```



IMGD 4000 (D 10)

15

Pursue with Offset


- Steering force to keep body at specified offset from target body
- Useful for:
 - marking an opponent in a sports simulation
 - docking with a spaceship
 - shadowing an aircraft
 - implementing battle formations
- NB: This is not “flocking”, which we will see later



IMGD 4000 (D 10)

16

Pursue with Offset

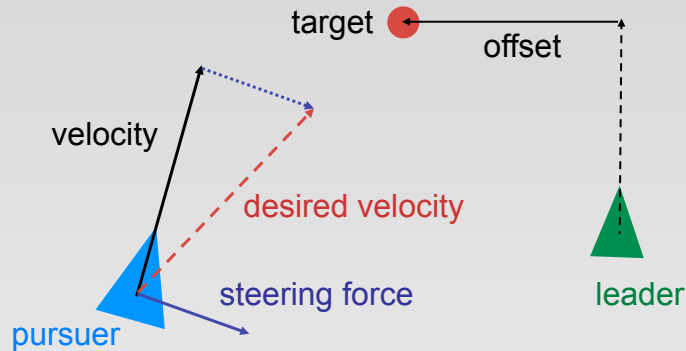

```
def pursue (body, offset) {
  // calculate lookahead time based on distance and speeds
  dt = |position - (body.position + offset)|
      / (maxSpeed + |body.velocity|);
  // arrive at predicted offset position (vs. seek)
  return arrive(body.position + offset + (body.velocity * dt));
}
```

DEMO



IMGD 4000 (D 10)

17

Interpose

- Similar to pursue
- Return steering force to move body to midpoint of imaginary line connecting two bodies
- Useful for:
 - bodyguard taking a bullet
 - soccer player intercepting a pass
- Like pursue, main trick is to estimate lookahead time (dt) to predict target point




IMGD 4000 (D 10)

18

Interpose

- (1) Bisect line between bodies
- (2) Calculate dt to bisection point
- (3) Target arrive at midpoint of predicted positions

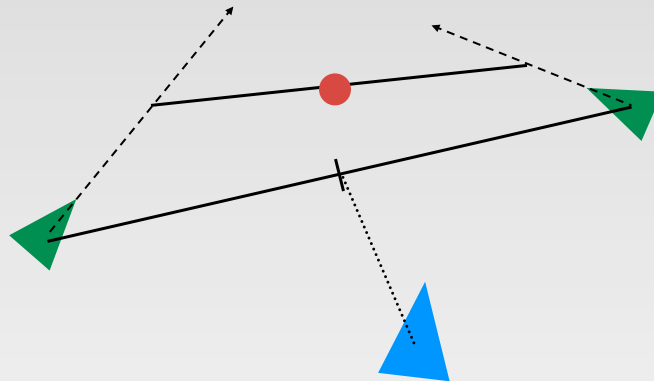

IMGD 4000 (D 10)

19

Interpose

```
def interpose (body1, body2) {
    // lookahead time to current midpoint
    dt = |body1.position + body2.position| / (2 * maxSpeed);

    // extrapolate body trajectories
    position1 = body1.position + body1.velocity * dt;
    position2 = body2.position + body2.velocity * dt;

    // steer to midpoint
    return arrive(position1 + position2 / 2);
}
```



IMGD 4000 (D 10)


DEMO

20


Path Following

- Create steering force that moves body along a series of *waypoints* (open or looped)
- Useful for:
 - patrolling (guard duty) agents
 - predefined paths through difficult terrain
 - racing cars around a track

open
path



looped
path



IMGD 4000 (D 10)

21



Path Following

- Invoke 'seek' on each waypoint until 'arrive' at finish (if any)

```

path = ...;           // (circular) list of waypoints
current = path.first() ; // current waypoint vector

def followPath () {
    if ( |current - position| < SEEK_DISTANCE )
        if ( path.isEmpty() )
            return arrive(current);
        else
            current = path.next();
    return seek(current);
}
  
```



IMGD 4000 (D 10)

22

Path Following

- Very sensitive to `SEEK_DISTANCE` and ratio of `maxForce` to `maxSpeed` (in underlying locomotion model)
 - tighter path following for interior corridors
 - looser for open outdoors



IMGD 4000 (D 10)

DEMO

23

Wander


- Goal is to produce a steering force which gives impression of a random walk though the agent's environment
- Naive approach:
 - calculate *random steering force* each update step
 - produces unpleasant "jittery" behavior
- Reynold's approach:
 - project a circle in front of body
 - steer towards a *randomly moving target* constrained along perimeter of the circle



IMGD 4000 (D 10)

24


Wander

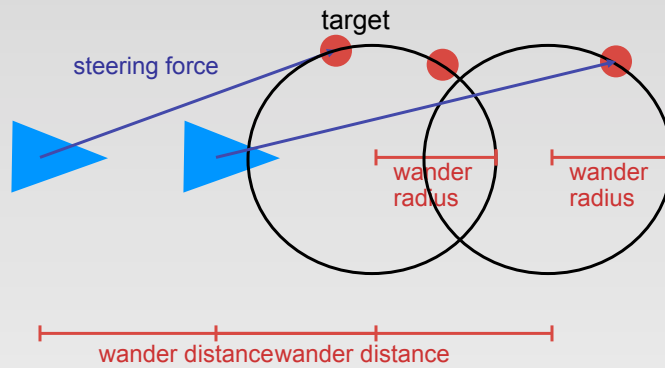

IMGD 4000 (D 10)

25

Wander



```
// initial random point on circle
wanderTarget = ...;

def wander () {

    // displace target random amount
    wanderTarget += [ random(0, JITTER), random(0, JITTER) ];

    // project target back onto circle
    wanderTarget.normalize();
    wanderTarget *= RADIUS;

    // move circle wander distance in front of agent
    wanderTarget += bodyToWorldCoord([DISTANCE, 0]);

    // steer towards target
    return wanderTarget - position;
}
```




IMGD 4000 (D 10)

DEMO

26

Obstacle Avoidance

- Treat obstacles as circular bounding volumes
- *Basic idea:* extrude “detection box” in front of body in direction of motion

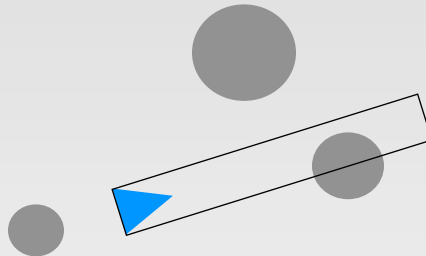


IMGD 4000 (D 10)

27

Obstacle Avoidance Algorithm

1. Find closest intersection point
2. Calculate steering force to avoid obstacle

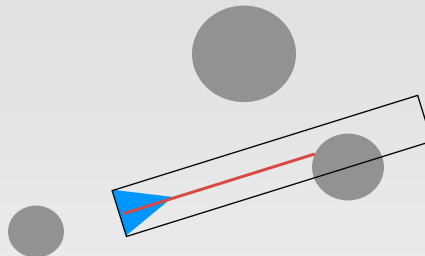


IMGD 4000 (D 10)

28

Obstacle Avoidance Algorithm

1. Find closest intersection point
 - (a) discard all obstacles which do not overlap with detection box
 - (b) expand obstacles by half width of detection box
 - (c) find intersection points of trajectory line and expanded obstacle circles
 - (d) choose closest intersection point *in front* of body

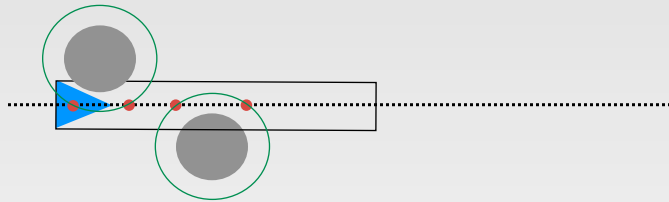


IMGD 4000 (D 10)

29

Obstacle Avoidance Algorithm

2. Calculate steering force
 - (a) combination of lateral and braking force
 - (b) each proportional to body's distance from obstacle (needs to react quicker if closer)

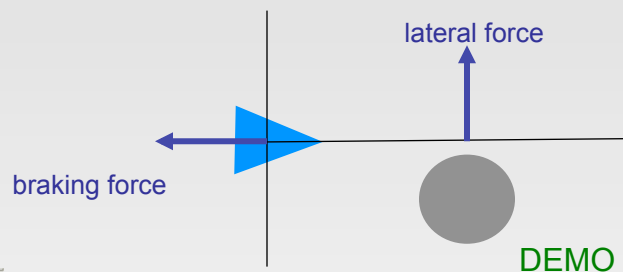

IMGD 4000 (D 10)

30

Hide

- Attempt to position body so that an obstacle is always between itself and other body
- Useful for:
 - NPC hiding from player
 - to avoid being shot by player
 - to sneak up on player (combine hide and seek)




IMGD 4000 (D 10)

31

Hide

- (a) for each obstacle, determine hiding spot
- (b) if no hiding spots, invoke 'evade'
- (c) otherwise, invoke 'arrive' to closest hiding spot

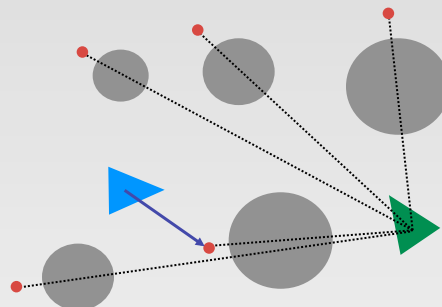

IMGD 4000 (D 10)

32

Hide - Possible Refinements

- Only hide if you can “see” other body
 - tends to look dumb (i.e., agent has no memory)
 - can improve by adding time constant, i.e., hide if you saw other body in last $<n>$ seconds
- Only hide if you can “see” other body *and* other body can see you




IMGD 4000 (D 10)

33

Hide - Possible Refinements

- Instead of always choosing *closest* hiding spot, favor spots that are *behind* or to *side* of other body

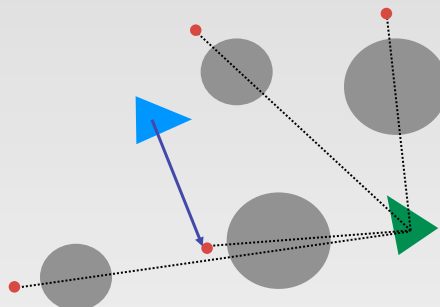

IMGD 4000 (D 10)

34

Hide - Possible Refinements

- Add “panic distance” (like flee behavior)

```
def hide (body) {
  if ( |position - target| > PANIC ) return [0,0];
  ...
}
```




IMGD 4000 (D 10)

DEMO

35

Wall Avoidance

- test for intersection of three “feelers” with wall
- calculate *penetration depth* of closest intersection
- return steering force perpendicular to wall with magnitude equal to penetration depth

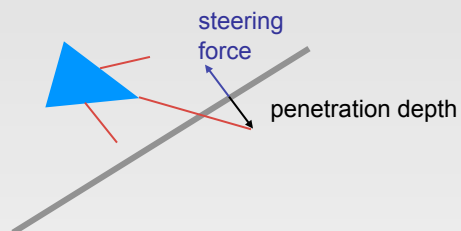

IMGD 4000 (D 10)

36

Combining Steering Behaviors

- battle bot
 - path following
 - wall avoidance
 - separation (to do)
- animal simulation (e.g., sheep)
 - wander
 - obstacle avoidance (e.g., trees)
 - evade (e.g., predator)



IMGD 4000 (D 10)

37

Combining Steering Forces

```
class Body
  def update (dt) {
    force = ...; // combine forces from steering behaviors
    ...}

  def seek (target) { ... return force; }
  def flee (target) { ... return force; }
  def arrive (target) { ... return force; }
  def pursue (body) { ... return force; }
  def evade (body) { ... return force; }
  def hide (body) { ... return force; }
  def interpose (body1, body2) { ... return force; }
  def wander () { ... return force; }
  def avoidObstacles () { ... return force; }
  ...
```



IMGD 4000 (D 10)

38

Combining Steering Forces

- Two basic approaches:
 - blending
 - priorities
- Advanced combined approaches:
 - weighted truncated running sum with prioritization [Buckland]
 - prioritized dithering [Buckland]
 - pipelining [Millington]
- All involve significant *tweaking* of parameters



IMGD 4000 (D 10)

39

Blending Steering

- **All** steering methods are called, each returning a force (could be [0,0])
- Forces combined as linear weighted sum:

$$w_1F_1 + w_2F_2 + w_3F_3 + \dots$$
 - weights do not need to sum to 1
 - weights tuned by trial and error
- Final result will be limited (truncated) by maxForce



IMGD 4000 (D 10)

40

Blended Steering - Problems

- Expensive, since all methods called every tick
- Conflicting forces not handled well
 - tries to “compromise”, rather than giving priority
 - e.g., avoid obstacle and seek, can end up partly penetrating obstacle
- Very hard to tweak weights to work well in all situations



IMGD 4000 (D 10)

41

Prioritized Steering

- *Intuition:* Many of steering behaviors only return a force in appropriate conditions
- *Algorithm:*
 - Sort steering methods into priority order
 - Call methods one at a time until first one returns non-zero force
 - Apply that force and *stop evaluation* (saves CPU)
- *Variation:*
 - Define groups of behaviors with blending inside each group and priorities between groups



IMGD 4000 (D 10)

42

Prioritized Dithering (Reynolds)

- In addition to priority order, associate a probability with each steering method
- Use random number and probability to sometimes skip some methods in priority order (on some ticks)
- Gives lower priority methods some influence without problems of blending




IMGD 4000 (D 10)

43

Ensuring Zero Overlap

- Often, when combining behaviors in the presence of multiple bodies, the bodies will occasionally overlap one another (they're not obstacles!)
- If bounding spheres overlap, just "teleport" to touching distance (ignore dynamics)

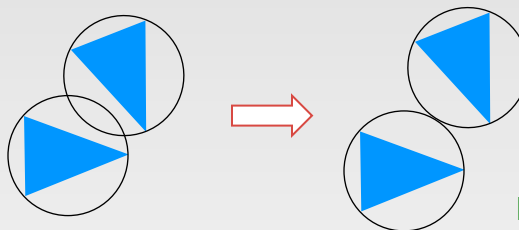

DEMO




IMGD 4000 (D 10)

44

Smoothing - The Problem

- Conflicting behaviors can alternate, causing “judder” (jitter/shudder)
 - e.g., avoidObstacle and seek
 - avoidObstacle forces you away from obstacle until it is out of range
 - seek pushes you back into range
 - ...

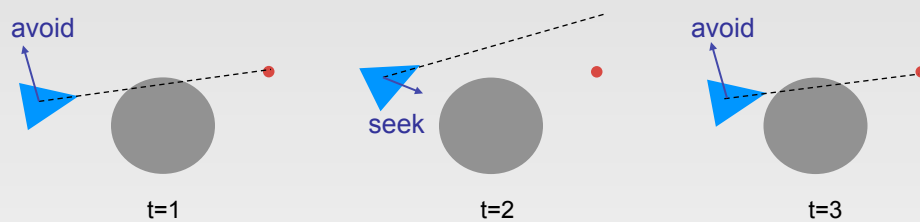

IMGD 4000 (D 10)

45

Smoothing - The Solution

- Ideally to avoid problem, foresee conflict ahead of time--but can be complicated and expensive to compute
- Simple hack (per Robin Green, Sony):
 - *decouple* heading from velocity vector
 - average heading over “several” ticks
 - tune number of ticks for smoothing (keep small to minimize memory and CPU)
 - not perfect solution, but produces adequate results at low cost



IMGD 4000 (D 10)

46

Group Steering Behaviors - “Flocking”

- Combination of three behaviors:
 - cohesion
 - separation
 - alignment
- Each applied to neighbors




IMGD 4000 (D 10)

DEMO

47

Neighbors

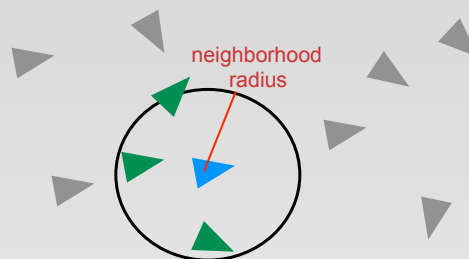

- Variation:
 - restrict neighborhood to field of view (e.g., 270 deg.) in *front*
 - may be more realistic in some applications




IMGD 4000 (D 10)

48

Separation

- Create force that steers body away from others in neighborhood

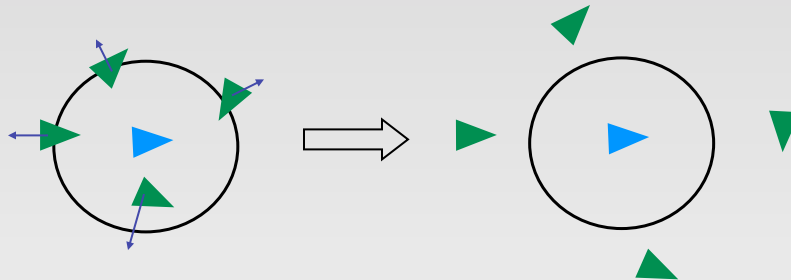


IMGD 4000 (D 10)

49

Separation

- Vector to each neighbor is normalized and divided by the distance (i.e., stronger force for closer neighbors)



```
def separation () {
  force = [0,0];
  for each neighbor
    direction = position - neighbor.position;
    force += normalize(direction) / |direction|;
  return force;
}
```




IMGD 4000 (D 10)

50

Alignment

- Attempt to keep body's heading aligned with its neighbors headings

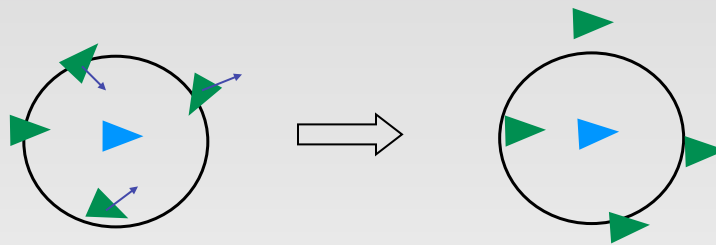


IMGD 4000 (D 10)

51

Alignment

- Return steering force to correct towards average heading vector of neighbors

```
def alignment () {
    average = [0,0];
    for each neighbor
        average += neighbor.heading;
    average /= |neighbors|;
    return average - heading;
}
```




IMGD 4000 (D 10)

52

Cohesion

- Produce steering force that moves body towards center of mass of neighbors

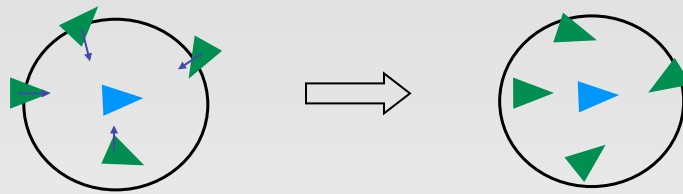


IMGD 4000 (D 10)

53

Cohesion

```
def cohesion () {  
  center = [0,0];  
  for each neighbor  
    center += neighbor.position;  
  center /= |neighbors|;  
  seek(center);  
}
```



IMGD 4000 (D 10)

54

Flocking

- An “emergent behavior”
 - looks complex and/or purposeful to observer
 - but actually driven by fairly simple rules
 - component entities don’t have the big picture
- Often used in films
 - bat and penguins in Batman Returns
 - orc armies in Lord of the Rings




IMGD 4000 (D 10)

DEMO

55

Connecting Steering to Action Selection

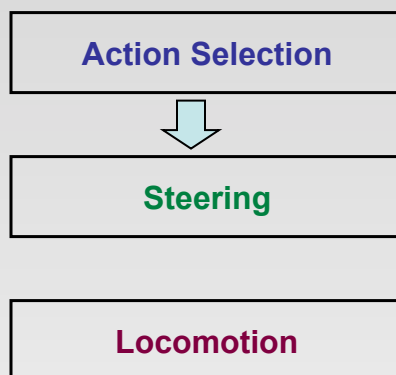

*Choosing goals and plans,
e.g.*

- “go here”
- “do A, B, and then C”



IMGD 4000 (D 10)

56

Turning Steering Methods On & Off

```
class Body
  seekTarget = null;
  fleeTarget = null;
  ...
  wanderOn = false;
  ...

  def think () { ... }

  def update (dt) {
    think();
    force = [0,0];
    if ( seekTarget != null ) force = combine(force, seek(seekTarget));
    if ( fleeTarget != null ) force = combine(force, flee(fleeTarget));
    ...
    if ( wanderOn ) force = combine(force, wander());
    ...
  }

  def seek (target) { ... return force; }
  def flee (target) { ... return force; }
  ...
  def wander () { ... return force; }
  ...
}
```

